



General specification :

IMP REF 28mm Tweeter :


- * 28mm germany silk dome diaphragm
- * Special coated silk
- * Full aluminium housing
- * Gold plated cable terminal
- * Neodymium magnet
- * Elevated chamber
- * Safety grill cover
- * max power 50W
- * sensitivity 92db
- * Freq range 1200hz - 20 KHz

IMP REF 6'5 Midbass :

- * 6,5" midbass driver
- * Fiber composite cone material
- * Rubber speaker surround
- * Diecast basket
- * max power 120W
- * Sensitivity 89db
- * Ferrite magnet
- * Freq range 58hz-5khz

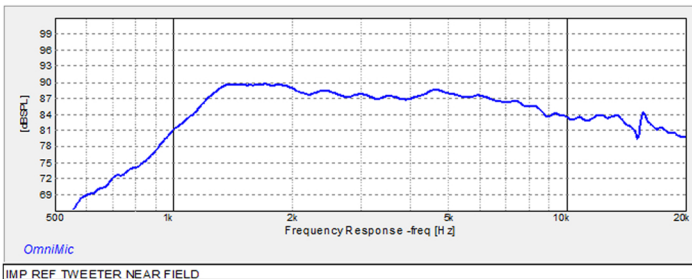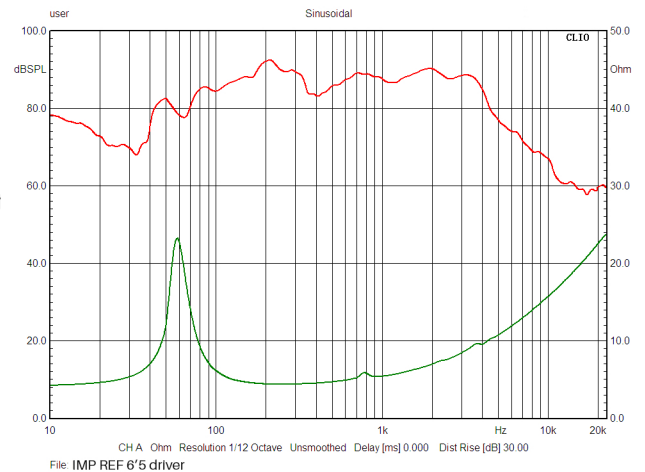

IMP REF TWEETER NEAR FIELD

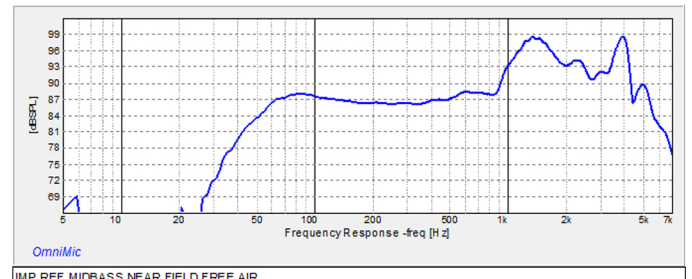

IMP REF MIDBASS NEAR FIELD FREE AIR

TS parameter midbass driver :

D 130 [mm]
 Re 4.012[Ohms]
 Fs 63.22[Hz]
 Zm 27.04[Ohms]
 BL 5.262[N/A]
 Qms 5.262
 Qes 0.9167
 Qts 0.7807
 Vas 9.848 [liters]
 L10k 0.2494 [mH]
 n0 0.2588 [%]
 dB SPL 86.23[1W/1m]
 Ms 15.92[grams]
 Cms 0.398[mm/N]

TS parameter tweeter :

D 28 [mm]
 Re 3.832[Ohms]
 Fs 1230 [Hz]
 Zm 8.846[Ohms]
 BL 0 [N/A]
 Qms 3.543
 Qes 2.708
 Qts 1.535
 L10k 0.04269 [mH]
 dB SPL 92[1W/1m]

General information :

Midbass overall diameter: 165mm
 Screw hole diameter : 157-8- 4.5
 Baffle cutout diameter : 145mm
 Depth : 67.5mm

Package information :

Shipping weight : 3kg
 size :
 408x264x95mm